



Serial ATA Flash Disk Product Specification V1.1

Contents:

1 Product Information	1
2 System Features	2
3 Specifications	3
4 Block Diagram	4
5 Dimension	5
6 Pin Assignments	6
7 Capacity Specifications	7
8 Electrical Specifications	8
9 DC Characters	8
10 AC Characters	8
11 Command Descriptions	9
11.1 Command Set	9
11.2 Descriptions	10
12 Ordering Information	18
12.2 1.8 inch Form Factor Part Numbers	18

1.Product Information

PCcardsDirect Serial ATA Flash Disk is solid-state design for serial and parallel ATA translation interface. It is an ideal replacement for standard SATA hard disk by no errors even under extreme shock and vibration conditions. The Serial ATA Flash Disk is extremely small and highly suitable for rugged environments, thus providing an excellent solution for space limitations. It is compatible with all consumer applications designed for data storage, allowing simple use for the end user.

The Serial ATA Flash Disk is SATA interface compatible and offering various capacities. It has low power consumption and can operate from a single 3.3/5.0 Volt power supply. The operating temperature grade is commercial operating temperature grade (0⁰C ~+70⁰C) and wide operating temperature grade (-40⁰C~+85⁰C). The Serial ATA Flash Disk has 2.5 inch and 1.8 inch for optional.


2. System Features

- Serial ATA 1.0a Specification compliant.
- SATA 7+15 pins combo connector.
- Low Power Consumption.
- Optional designs for 2.5 inch and 1.8inch.
- High reliability assured based on the internal Error Correcting Code function.
- Reliable wear-leveling algorithm to ensure the best of flash endurance.
- Excellent performance supporting Ultra DMA Mode.
- Capacity supported: 128MB, 256MB, 512MB, 1GB, 2GB, 4GB, and 8GB (unformatted).


3.Specifications

Compatibility	Serial ATA 1.0a Specification	
Flash Technology	NAND Type SLC Flash Memory Base	
Form Factor	2.5inch or 1.8inch	
Connector Types	Standard 7+15-pin male Serial ATA connector	
System Performance		
Data Transfer Mode	UDMA Mode	
Sequential Read	Max up to 25Mbytes / sec	
Sequential Write	Max up to 19Mbytes / sec	
Average Access Time	1ms	
Environmental Specification		
Standard Temperature	Operation	0°C ~ +70°C
	Non-operation	-20°C ~ +80°C
Wide Temperature	Operation	-40°C ~ +85°C
	Non-operation	-50°C ~ +95°C
Vibration	Operation max	20 G
	Non-operation max	20 G
Humidity	Operation max	5~95% non-condensing
	Non-operation max	5~95% non-condensing
Shock	Operation max	1500 G
	Non-operation max	1500 G
Reliability		
MTBF	> 1,000,000 hours	
Error Code Correction	4 bits ECC Code	
Endurance	Greater than 1,000,000 cycles logically contributed by Wear-leveling and advanced bad sector management algorithms	
Data Reliability	< 1 non-recoverable error 10 ¹⁴ bits read	
Data Retention	10 years	
Power Consumption		
Power Voltage	+5V ± 10%	
Read	190mA(Typ.)	
Write	220mA(Typ.)	
Sleep Mode	130mA(Typ.)	


4.Block Diagram

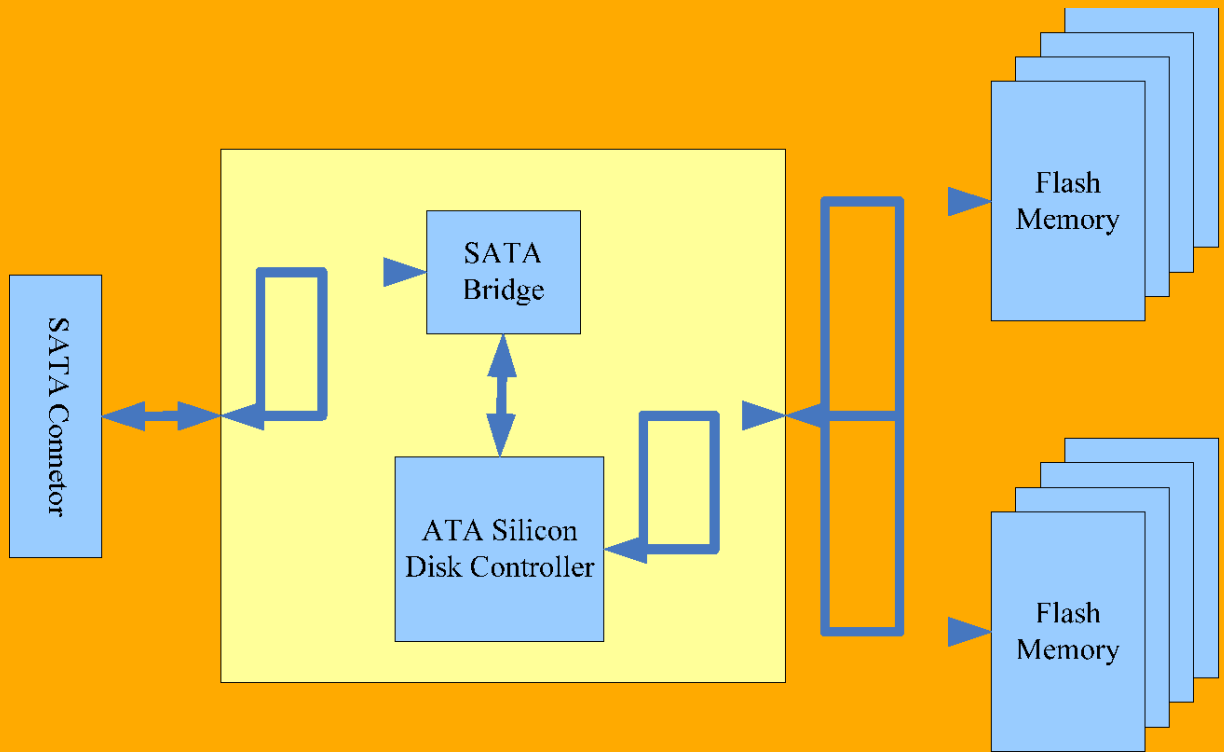

5.Dimension

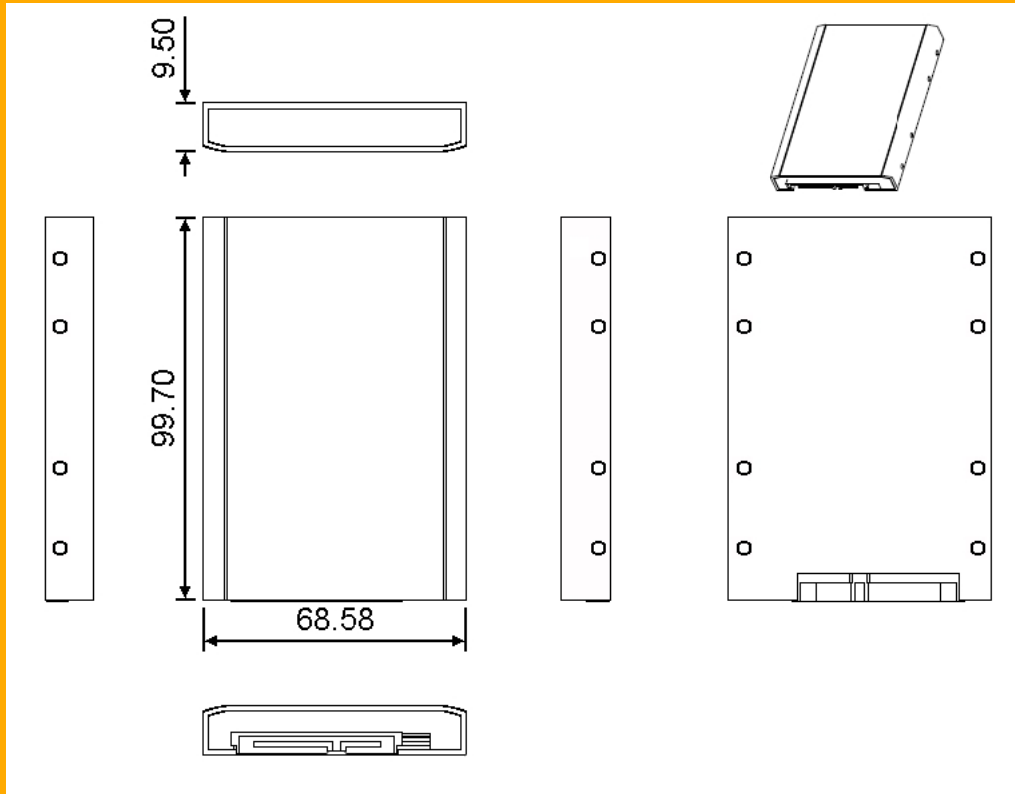

2.5 inch Form Factor

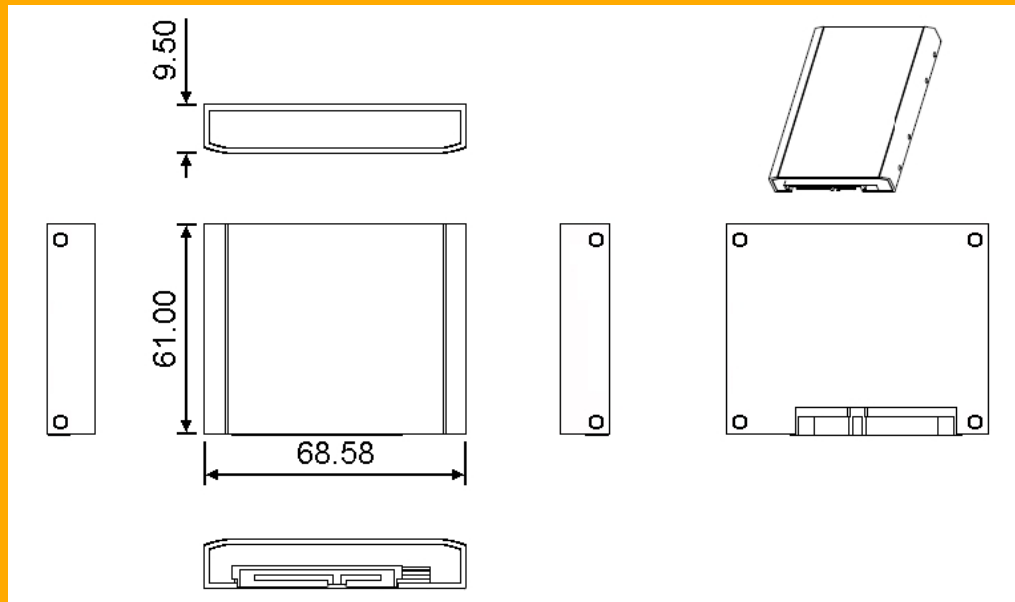


1.8 inch Form Factor

6.Pin Assignments

	Pin Number	Name	Type
Signal Segment	S1	GND	2 nd mate
	S2	A+	Differential signal pair A
	S3	A-	
	S4	GND	2 nd mate
	S5	B-	Differential signal pair B
	S6	B+	
	S7	GND	2 nd mate
Power Segment	P1	V ₃₃	3.3 V power
	P2	V ₃₃	3.3 V power
	P3	V ₃₃	3.3 V power, pre-charge, 2 nd mate
	P4	GND	1 st mate
	P5	GND	2 nd mate
	P6	GND	2 nd mate
	P7	V ₅	5 V power, pre-charge, 2 nd mate
	P8	V ₅	5 V power
	P9	V ₅	5 V power
	P10	GND	2 nd mate
	P11	Reserved	1. The pin corresponding to P11 in the backplane receptacle connector is also reserved 2. The corresponding pin to be mated with P11 in the power cable receptacle connector shall always be grounded
	P12	GND	1 st mate
	P13	V ₁₂	12 V power, pre-charge, 2 nd mate
	P14	V ₁₂	12 V power
	P15	V ₁₂	12 V power

Note: 1. All pins are in a single row, with a 1.27 mm (.050") pitch.

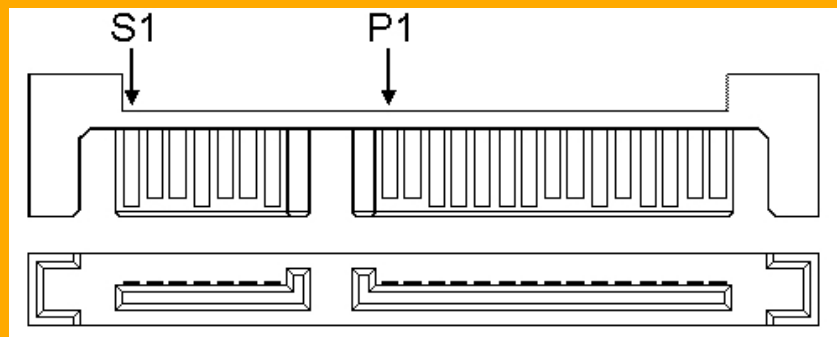

7.Capacity Specifications

The follow table is the default number of heads, sectors/track and cylinders.

Unformatted Capacity	Default Cylinder	Default Head	Default Sector	Defaulted CHS Capacity
128MB	978	8	32	128,188,416
256MB	978	16	32	256,376,832
512MB	993	16	63	512,483,328
1GB	1,985	16	63	1,024,450,560
2GB	3,954	16	63	2,040,643,584
4GB	7,889	16	63	4,071,481,344
8GB	15,778	16	63	8,142,962,688

8. Electrical Specifications

Symbol	Parameter	Rating	Units
V _{CC}	Power Supply	-0.3 to 5.5	V
V _{IN}	Input Voltage	-0.3 to V _{CC} +0.3	V
V _{OUT}	Output Voltage	-0.3 to V _{CC} +0.3	V
V _{CCQ}	Power supply for host I/O and embedded regulator	-0.6 to 5.5	V
V _{IN_HOST}	Input voltage for host I/O	-0.3 to V _{CCQ} +0.3	V
V _{OUT_HOST}	Output voltage for host I/O	-0.3 to V _{CCQ} +0.3	V
T _{OPR-I}	Industrial temperature grade	-40 ⁰ C to +85 ⁰ C	⁰ C
T _{OPR}	Commercial temperature grade	0 ⁰ C to +70 ⁰ C	⁰ C
T _{STG}	Storage temperature	-55 ⁰ C to 150 ⁰ C	⁰ C

9. DC Characters

Symbol	Parameter	Condition	MIN	TYP	MAX	Unit
	DC sink current		8			mA
	Internal pull-up current		40		160	uA
	Input low-voltage	V _{IL}			0.8	V
	Input high-voltage	V _{IH}	2.0		5.0	V
	Output low-voltage	V _{OL}	0		0.4	V
	Output high-voltage	V _{OH}	2.6		3.6	V

10. AC Characters

Symbol	Parameter	Condition	MIN	TYP	MAX	Unit
	Rising slew-rate		0.4	0.7	1.0	V/ns
	Falling slew-rate		0.4	0.7	1.0	V/ns
	Device Capacitance	C device			27	pF

11 Command Descriptions

11.1 Command Set

The following table summarizes the command defined in ATAPI-5 specification and lists the commands supported.

No.	Command set	Code	FR ₁	SC ₁	SN ₁	CY ₁	DR ₁	HD ₁	LBA ₁
1	CFA Erase Sector(s)	C0h	-	Y	Y	Y	Y	Y	Y
2	CFA Request Extended Error Code	03h	-	-	-	-	Y	-	-
3	CFA Translate Sector	87h	-	Y	Y	Y	Y	Y	Y
4	CFA Write Multiple w/o Erase	CDh	-	Y	Y	Y	Y	Y	Y
5	CFA Write Sector w/o Erase	38h	-	Y	Y	Y	Y	Y	Y
6	Check Power Mode	E5h	-	-	-	-	Y	-	-
7	Execute Device Diagnostic	90h	-	-	-	-	Y	-	-
8	Identify Device	ECh	-	-	-	-	Y	-	-
9	Idle	E3h	-	Y	-	-	Y	-	-
10	Idle Immediate	E1h	-	-	-	-	Y	-	-
11	Initialize Device Parameters	91h	-	Y	-	-	Y	Y	-
12	Read Buffer	E4h	-	-	-	-	Y	-	-
13	Read DMA	C8h	-	Y	Y	Y	Y	Y	Y
14	Read Multiple	C4h	-	Y	Y	Y	Y	Y	Y
15	Read Sector(s)	20h	-	Y	Y	Y	Y	Y	Y
16	Read Verify Sector(s)	40h	-	Y	Y	Y	Y	Y	Y
17	Seek	70h	-	-	Y	Y	Y	Y	Y
18	Set Features	EFh	Y	C	-	-	Y	-	-
19	Set Multiple Mode	C6h	-	Y	-	-	Y	-	-
20	Sleep	E6h	-	-	-	-	Y	-	-
21	Standby	E2h	-	-	-	-	Y	-	-
22	Standby Immediate	E0h	-	-	-	-	Y	-	-
23	Write Buffer	E8h	-	-	-	-	Y	-	-
24	Write DMA	CAh	-	Y	Y	Y	Y	Y	Y
25	Write Multiple	C5h	-	Y	Y	Y	Y	Y	Y
26	Write Sector	30h	-	Y	Y	Y	Y	Y	Y

Note:

1. FR: Feature Register SC: Sector Count register SN: Sector Number register CY: Cylinder Low/High register DR: Drive bit of Drive/Head register HD: Head No. (bit0-bit3) of Drive/Head register LBA: Logical Block Address Mode Supported.

2. Y: Set up; -: Not set up; C: The register contains command specific data

11.2 Descriptions

(1) CFA Erase Sector(s)

This command pre-erases and conditions from 1 to 256 sectors in the Sector Count register. This command must be issued in advance of CFA Write without Erase or CFA Write Multiple without Erase command to increase the execution speed of the write operation.

(2) CFA Request Extended Error Code

This command requests extended error information for the previous command. The extended error code is returned to the host in the Error Register.

(3) CFA Translate Sector

This command allows the host a method of determining the exact times a user sector has been erased and programmed. This controller will respond with a 512-byte buffer of information containing the desired cylinder, head and sector, including its Logical Address.

(4) CFA Write Multiple w/o Erase

This command is similar to Write Multiple command with the exception that an implied erase before write operation is not performed.

(5) CFA Write Sector w/o Erase

This command is similar to the Write Sector(s) command with the exception that an implied erase before write operation is not performed.

(6) Check Power Mode

This command allows the host to determine the current power mode of the device. This command will not cause this controller to change power mode.

(7) Execute Device Diagnostic

This command causes the controller to perform the internal diagnostic tests.

(8) Identify Device

This command enables the host to receive parameter information from the device. The following table specifies each field in the data returned by Identify Device command. Some values that are denoted "C" in the F/V column can be customized using the software provided by PCcardsDirect, please contact a representatives from PCcardsDirect.

Word address	F/V ¹	Description	Value
0	F X F X	General configuration bit-significant information: 15 0 = ATA device 14-8 Reserved. 7 0 = the device is a fixed disk 6-0 Reserved.	044Ah
1	V	Number of logical cylinders	xxxxh ¹
2	V	Specific configuration	0000h
3	F	Number of logical heads	xxxxh
4 - 5	X	Reserved	xxxxh
6	F	Number of logical sectors per logical track	xxxxh
7 - 8	X	Reserved	xxxxh
9	X	Reserved	0000h
10 to 19	C	Serial number (20 ASCII characters)	aaaa ²
20	X	Reserved	0001h
21 - 22	X	Reserved	0004h
23 - 26	F	Firmware revision (8 ASCII characters)	aaaa
27 - 46	C	Model number (40 ASCII characters)	aaaa
47	F F	15-8 80h 7-0 01h = Maximum number of sector on Read/Write Multiple command	8001h
48	F	Reserved	0000h
49	F F F F F F X	Capabilities 15-14 Reserved 13 0 = Standby timer is managed by this controller 12 Reserved 11 1 = IORDY supported. 10 1 = IORDY may be disabled. 9 1 = LBA mode addressing supported. 8 1 = DMA supported. 7 - 0 Reserved	0F00h
50	F	15- 0 0000h = the contents of word 50 is not valid.	0000h
51	F	Reserved.	0200h
52	X	Reserved	0000h
53	F F F	15- 3 Reserved. 2 1 = the field reported in word 88 are valid 1 1 = the field reported in word (70:64) are valid 0 1 = the field reported in word 54-58 are valid	0007h
54	V	Number of current logical cylinders	xxxxh
55	V	Number of current logical heads	xxxxh

56	V	Number of current logical sectors per track		xxxxh
57- 58	V	Current capacity in sectors		xxxxh
59	F	15- 9	Reserved	0101h
	V	8	1 = multiple sector setting is valid xxh = current setting for number of sectors that is transferred per interrupt on R/W Multiple commands.	
	V	7- 0		
60 - 61	F	Total number of user addressable sectors		xxxxh
62	X	Reserved		0000h
63	F	15-11	Reserved.	0407h
	V	10- 8	Multiword DMA mode 2-0 selected.	
	F	7- 3	Reserved.	
	F	2	1 = Multiword DMA mode 2, 1 and 0 are supported.	
	F	1	1 = Multiword DMA mode 1 and 0 are supported.	
64	F	0	1 = Multiword DMA mode 0 is supported.	0003h
	C	1	1 = PIO mode 4 is supported.	
	F	0	1 = PIO mode 3 is supported.	
66	F	15- 0	0078h = minimum Multiword DMA transfer cycle time = 120 nano seconds.	0078h
67	F	15- 0	0078h = recommended Multiword DMA transfer cycle time = 120 nano seconds.	0078h
68	F	15- 0	0078h = minimum PIO transfer cycle time without flow control = 120 nano seconds.	0078h
69	F	15- 0	0078h = minimum PIO transfer cycle time with IORDY flow control = 120 nano seconds.	0078h
69 - 79	F	Reserved		0000h
80	F	15- 0	0000h = Major version number is not reported.	0000h
81	F	15- 0	0000h = Minor version number is not reported.	0000h
82		Command set supported.		3000h
	X	15	Reserved.	
	F	14	1 = NOP command supported.	
	F	13	1 = READ BUFFER command supported.	
	F	12	1 = WRITE BUFFER command supported.	
	X	11	Reserved.	
	F	10	1 = Host Protected Area feature set supported.	
	F	9	1 = DEVICE RESET command supported.	
	F	8	1 = SERVICE interrupt supported.	
	F	7	1 = release interrupt supported.	
F	6	1 = look-ahead supported.		

	F	5 1 = write cache supported.	
	F	4 1 = Shall be cleared to zero.	
	F	3 1 = mandatory power management feature set supported.	
	F	2 1 = Removable Media feature set supported.	
	F	1 1 = Security Mode feature set supported.	
	F	0 1 = SMART feature set supported.	
83 - 84	F	15- 0 0000h = features/command sets supported are not indicated.	0000h
85	X	Command set/ feature enabled.	3000h
	X	15 Reserved.	
	F	14 1 = NOP command enabled.	
	F	13 1 = READ BUFFER command enabled.	
	F	12 1 = WRITE BUFFER command enabled.	
	X	11 Reserved.	
	V	10 1 = Host Protected Area feature set enabled.	
	F	9 1 = DEVICE RESET command enabled.	
	V	8 1 = SERVICE interrupt enabled.	
	V	7 1 = release interrupt enabled.	
	V	6 1 = look-ahead enabled.	
	V	5 1 = write cache enabled.	
	F	4 1 = Shall be cleared to zero.	
	F	3 1 = power management feature set enabled.	
	F	2 1 = Removable Media feature set enabled.	
	V	1 1 = Security Mode feature set enabled.	
	V	0 1 = SMART feature set enabled.	
85 - 87	F	15- 0 0000h = features/command sets enabled are not indicated.	0000h
88	F	15-13 Reserved.	001Fh
	V	12 1 = Ultra DMA mode 4 is selected	
	V	11 1 = Ultra DMA mode 3 is selected.	
	V	10 1 = Ultra DMA mode 2 is selected	
	V	9 1 = Ultra DMA mode 1 is selected.	
	V	8 1 = Ultra DMA mode 0 is selected.	
	F	7- 5 Reserved	
	C	4 1 = Ultra DMA mode 4 and below are supported.	
	F	3 1 = Ultra DMA mode 3 and below are supported.	
	C	2 1 = Ultra DMA mode 2 and below are supported.	

	F	1	1 = Ultra DMA mode 1 and below are supported.	
	C	0	1 = Ultra DMA mode 0 is supported.	
89	F		Time required for security erase unit completion. 15- 0 0000h = value not specified.	0000h
90	F		Time required for Enhanced security erase unit completion. 15- 0 0000h = value not specified.	0000h
91	V		Current advanced power management value 15- 0 0000h = value not specified.	0000h
92	V		Master Password Revision Code.	0000h
93	V		Reserved.	0000h
94	V		15- 0 0000h = Automatic Acoustic Management feature set is not supported.	0000h
95 - 99	F		Reserved	0000h
100 - 103	V		The 48-bit Address feature set is not supported.	0000h
104 - 126	F		Reserved.	0000h
127	F		Removable Media Status Notification feature set support 15 - 2 Reserved.	0000h
	F		1 - 0 00b = This feature set is not supported.	
128	F		Security Status 15 - 9 Reserved.	0000h
	F		8 - 0 000h = Security Mode Feature set is not supported.	
129 - 159	X		Reserved	0000h
160	F		15- 0 0000h = the CFA Power Mode 1 is not supported.	0000h
161 - 162	F		Reserved.	0000h
163	F		Reserved.	0000h
164	F		Reserved.	001Bh
165 - 175	F		Reserved.	aaaa
176 - 205	F		Current media serial number is not indicated.	0000h
206 - 254	F		Reserved.	0000h
255	F		Integrity word 15- 8 Checksum 7 -0 Signature.	0000h

Note:

1. F/V = Fixed/Variable content F = the content of the word is fixed and does not change. V = the content of the word is variable and may be changed depending on the state of the device, commands executed. X = the content of the word may be fixed or variable. C = vendor specific data which can be customized before device shipping.

2. aaaa indicates an ASCII vendor string; x indicates a numeric nibble value.

(9) Idle

This command allows the host to place the device in the Idle mode and also set the Standby timer.

(10) Idle Immediate

This command allows the host to immediately place the device in the Idle mode.

(11) Initialize Device Parameters

This command enables the host to set the number of sectors per track and number of heads per cylinder.

(12) Read Buffer

This command enables the host to read the current contents of the device's sector buffer.

(13) Read DMA

This command allows the host to read data using the DMA data transfer protocol.

(14) Read Multiple

This command reads the a number of sectors specified in the Sector Count register. The number of sectors per block is defined by the content of word 59 in the Identify Device response. A successful Set Multiple Mode command has to precede this command.

(15) Read Sector(s)

This command reads from 1 to 256 sectors as specified in the Sector Count register. A sector count of 0 will be treated as 256 sectors. The transfer begins at the sector specified in the LBA Low, LBA Mid, LBA High and Device registers.

(16) Read Verify Sector(s)

This command is identical to Read Sector(s) command, except that DRQ is never set and no data is transferred to the host.

(17) Seek

This command allows the host to provide advanced notification that particular data may be requested by the host in a subsequent command.

(18) Set Features

This command is used by the host to establish parameters that affect the execution of certain features. The following table defines all features that are supported by this controller. If any subcommand input value is not supported or is invalid, this controller will return command aborted.

Feature	Operation
01h	Reserved.
02h	Enable Write Cache.
03h	Set transfer mode based on value in Sector Count register.
05h	Enable Advanced Power Management.
09h	Reserved.
0Ah	Reserved.
44h	Reserved.
55h	Disable Read Look Ahead feature.
66h	Disable reverting to power-on defaults.
69h	Reserved.
81h	Reserved.
82h	Disable Write Cache.
85h	Disable Advanced Power Management.
89h	Reserved.
8Ah	Reserved.
96h	Reserved.
97h	Reserved.
9Ah	Reserved.
AAh	Enable Read Lock Ahead feature.
BBh	Reserved.
CCh	Enable reverting to power-on defaults.

(19) Set Multiple Mode

Upon receipt of this command, the controller will perform Read and Write Multiple operations and establishes the block count for these commands. This controller will set BSY to 1 and checks the Sector Register for the number of sectors per block.

(20) Sleep

Upon receipt of this command, the controller will set BSY and enter Sleep mode, clear BSY and generate an interrupt.

(21) Standby

This command will cause the device to enter Standby mode. The value in the Sector Count register is used to determine the time programmed into the Standby timer.

(22) Standby Immediate This command will cause the device to immediately enter Standby mode.

(23) Write Buffer

This command allows the host to overwrite contents of a sector buffer with any data pattern desired.

(24) Write DMA This command allows the host to write data using the DMA data transfer protocol.

(25) Write Multiple

This command is similar to the Write Sector(s) command. Interrupts are not presented on each sector but on the transfer of a block that contains the number of sectors defined by Set Multiple.

(26) Write Sector

This command writes from 1 to 256 sectors as specified in the Sector Count register. A sector count of 0 will be treated as 256 sectors. This controller will interrupt for each DRQ block transferred.

12 Ordering Information

12.1 2.5 inch Form Factor

PCDSFD2516MB 16MB Commercial TEMP, Industrial GRADE, 2.5" SATA Flash Drive
 PCDSFD2532MB 32MB Commercial TEMP, Industrial GRADE, 2.5" SATA Flash Drive
 PCDSFD2564MB 64MB Commercial TEMP, Industrial GRADE, 2.5" SATA Flash Drive
 PCDSFD25128MB 128MB Commercial TEMP, Industrial GRADE, 2.5" SATA Flash Drive
 PCDSFD25256MB 256MB Commercial TEMP, Industrial GRADE, 2.5" SATA Flash Drive
 PCDSFD25512MB 512MB Commercial TEMP, Industrial GRADE, 2.5" SATA Flash Drive
 PCDSFD251024MB 1GB Commercial TEMP, Industrial GRADE, 2.5" SATA Flash Drive
 PCDSFD252048MB 2GB Commercial TEMP, Industrial GRADE, 2.5" SATA Flash Drive
 PCDSFD254096MB 4GB Commercial TEMP, Industrial GRADE, 2.5" SATA Flash Drive
 PCDSFD258192MB 8GB Commercial TEMP, Industrial GRADE, 2.5" SATA Flash Drive
 PCDSFD2516MBI 16MB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 2.5" SATA Flash Drive
 PCDSFD2532MBI 32MB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 2.5" SATA Flash Drive
 PCDSFD2564MBI 64MB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 2.5" SATA Flash Drive
 PCDSFD25128MBI 128MB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 2.5" SATA Flash Drive
 PCDSFD25256MBI 256MB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 2.5" SATA Flash Drive
 PCDSFD25512MBI 512MB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 2.5" SATA Flash Drive
 PCDSFD251024MBI 1GB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 2.5" SATA Flash Drive
 PCDSFD252048MBI 2GB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 2.5" SATA Flash Drive
 PCDSFD254096MBI 4GB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 2.5" SATA Flash Drive
 PCDSFD258192MBI 8GB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 2.5" SATA Flash Drive

12.2 1.8 inch Form Factor

PCDSFD1816MB 16MB Commercial TEMP, Industrial GRADE, 1.8" SATA Flash Drive
 PCDSFD1832MB 32MB Commercial TEMP, Industrial GRADE, 1.8" SATA Flash Drive
 PCDSFD1864MB 64MB Commercial TEMP, Industrial GRADE, 1.8" SATA Flash Drive
 PCDSFD18128MB 128MB Commercial TEMP, Industrial GRADE, 1.8" SATA Flash Drive
 PCDSFD18256MB 256MB Commercial TEMP, Industrial GRADE, 1.8" SATA Flash Drive
 PCDSFD18512MB 512MB Commercial TEMP, Industrial GRADE, 1.8" SATA Flash Drive
 PCDSFD181024MB 1GB Commercial TEMP, Industrial GRADE, 1.8" SATA Flash Drive
 PCDSFD182048MB 2GB Commercial TEMP, Industrial GRADE, 1.8" SATA Flash Drive
 PCDSFD184096MB 4GB Commercial TEMP, Industrial GRADE, 1.8" SATA Flash Drive
 PCDSFD188192MB 8GB Commercial TEMP, Industrial GRADE, 1.8" SATA Flash Drive
 PCDSFD1816384MB 16GB Commercial TEMP, Industrial GRADE, 1.8" SATA Flash Drive
 PCDSFD1832768MB 32GB Commercial TEMP, Industrial GRADE, 1.8" SATA Flash Drive
 PCDSFD1816MBI 16MB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 1.8" SATA Flash Drive
 PCDSFD1832MBI 32MB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 1.8" SATA Flash Drive
 PCDSFD1864MBI 64MB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 1.8" SATA Flash Drive
 PCDSFD18128MBI 128MB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 1.8" SATA Flash Drive
 PCDSFD18256MBI 256MB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 1.8" SATA Flash Drive
 PCDSFD18512MBI 512MB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 1.8" SATA Flash Drive
 PCDSFD181024MBI 1GB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 1.8" SATA Flash Drive
 PCDSFD182048MBI 2GB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 1.8" SATA Flash Drive
 PCDSFD184096MBI 4GB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 1.8" SATA Flash Drive
 PCDSFD188192MBI 8GB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 1.8" SATA Flash Drive
 PCDSFD1816384MBI 16GB INDUSTRIAL TEMP, INDUSTRIAL GRADE, 1.8" SATA Flash Drive